



A.R3


**ARB-15**

**ARCHITECTURAL / HIGH ABUSE**

ARCHITECTURAL  
ROUND  
HALF LID FACEPLATE  
SURFACE FLUORESCENT

**15 in. Round**

LIGHTING FOR COMPLEX ENVIRONMENTS

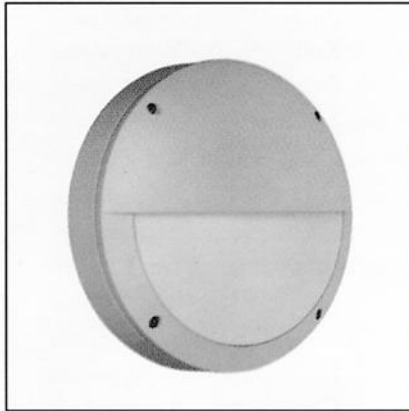

These aesthetically pleasing Architectural fixtures feature die cast aluminum Housing, molded unbreakable lens and optional tamperproof screws, which help ARB Series withstand severe punishment, and make them ideally suited for both every day and high abuse areas.


**APPLICATIONS**

- Building facades
- Schools / Universities
- Apartments / Condominiums / Public Housing
- Convenience Stores
- Government Facilities
- Hospitals


**FEATURES**

- Cast aluminum Housing
- 15 in. diameter nominal size
- Injection molded prismatic polycarbonate Refractor provides uniform illumination
- Optional Tamperproof Screws
- Wall mounted
- Non-corrosive durable coating
- Maintenance free, one time installation
- Stands up to physical impact and tampering
- Suitable for high pressure Hosedown

**OVERALL DIMENSIONS**

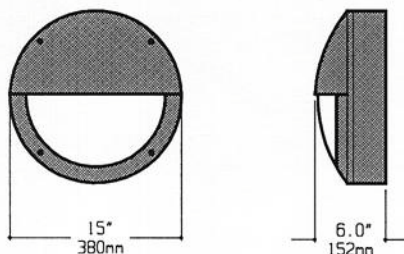


**MOUNTING**

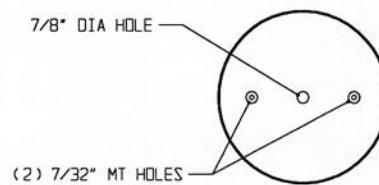

**SPECIFICATIONS**

|                  |  |                    |  |
|------------------|--|--------------------|--|
| <b>HOUSING</b>   | Faceplate and Base in die cast aluminum. Silver color standard. Optional colors: White, Black, Bronze. | <b>LAMPS</b>       | 13W Twin, 13, 18, or 26W Quad, 32W PLT Lamps. See Lamp Options. (Lamps by others). |
| <b>GASKET</b>    | Weather proof silicone Gasket around inside of Lens seals Lens to Housing.                             | <b>BALLAST</b>     | NPF, self-start Class P, or electronic Ballast. (See Voltage, Ballast Options).    |
| <b>FASTENERS</b> | (4) Captive stainless steel fasteners. (For tamperproof fasteners see Options).                        | <b>FINISH</b>      | Polyester Powder coat finish. Silver standard. (See Color Options).                |
| <b>LENS</b>      | .156" Opal injection molded polycarbonate Lens for even illumination.                                  | <b>U.L. LISTED</b> | Suitable for Wet Locations.  |

**LAMP SELECTION**



LAMPS: (1) 13W Twin  
(1) 13W Quad  
(1) 18W Quad  
(1) 26W Quad  
(1) 32W PLT



LAMPS: (2) 13W Twin  
(2) 13W Quad  
(2) 18W Quad  
(2) 26W Quad

**ORDERING INFORMATION**

**ARB-15 -**

| No. of LAMPS | WATTAGE            | VOLTAGE           | BALLAST                         | OPTIONS   |
|--------------|--------------------|-------------------|---------------------------------|---|
| 1= 1 Lamp    | 13=13W Twin (1,2)  | 120=120 Volts     | EB=Electronic Ballast           | GF=GLR Fuse   |
| 2= 2 Lamps   | 13Q=13W Quad (1,2) | 277=277 Volts     | MB=Magnetic Ballast             | TH=Torx Head TP Screw                                       |
|              | 18Q=18W Quad (1,2) | 347=347 Volts     | EBH=Electronic Ballast <10% THD | AH=Allen Head TP Screw                                      |
|              | 26Q=26W Quad (1,2) | UNV=120-277 Volts |                                 | BRZ=Bronze Finish   |
|              | 32P=32W PLT (1)    |                   |                                 | BLK=Black Finish  |
|              |                    |                   |                                 | WHT=White Finish  |
|              |                    |                   |                                 | EM=Emergency Ballast (Test switch and light inside housing) |

(More than one Option can be specified)

**EXAMPLE: ARB - 15 - 2 - 18Q - 277 - EB - GF - AH**

**DESCRIPTION:** **ARB - 15** = Series ARB, 15 inches round nominal size  
**2** = 2 Lamps  
**18Q** = 18 Watts Quad Tube  
**277** = 277 Volt Operation  
**EB** = Electronic Ballast  
**GF** = GLR Fuse  
**AH** = Allen Head TP Screws

| FIXTURE TYPE   |         | COMMENTS |
|----------------|---------|----------|
| CATALOG NUMBER | ARB-15- |          |
| JOB NAME       |         |          |
| APPROVAL       |         |          |
| DATE           |         |          |