

LIGHTING FOR COMPLEX ENVIRONMENTS

1 ft. long

APPLICATIONS


- Detention Cell Lighting
- Prison Day Rooms and Common Areas
- Psychiatric Ward Lighting
- Rehabilitation Centers
- Dormitories

Heavy gauge housings with concealed hinges, unbreakable lenses, tamperproof screws and absence of cracks and crevices make DWM Series ideally suited for DETENTION and SECURITY areas, where physical attack or abuse are expected.


FEATURES

- ♦ Hinged, one piece, heavy gauge Lens Housing
- ♦ Maximum, Medium, Minimum or Super Maximum security
- ♦ One piece Backplate with a blade trap
- ♦ Exterior / Interior Lens system provides protection and uniform illumination
- ♦ Tamperproof Screws with captive cage nuts
- ♦ Concealed Hinge with welded pin end to optimize security
- ♦ Removable Power Tray
- ♦ Lens secured to Lens Housing by through studs and heavy gauge steel rails
- ♦ Dual Window Housing for wide spread light distribution


CROSS SECTION

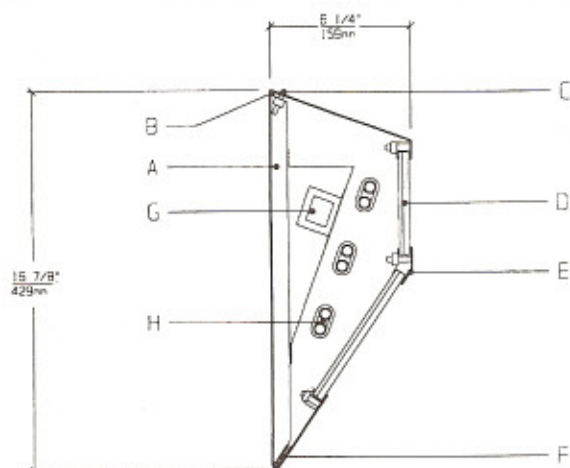

LENS HOUSING DIMENSIONS



BACK VIEW / MOUNTING DIMENSIONS

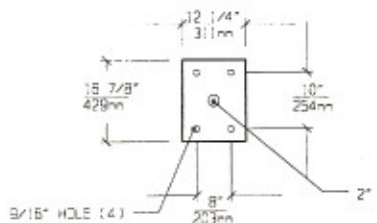

SPECIFICATIONS

<p>A. BACKPLATE Die formed cold rolled steel Backplate, with contraband drop slot. Gauge to match Housing.</p> <p>B. GASKET Polyurethane Gasket around inside of Lens Housing to prevent light leaks.</p> <p>C. FASTENERS Captive tamperproof fasteners. (Torx head standard. For others see Options).</p> <p>D. LENS Per spec. Specify Lenses for Room / Lamp sides. (See Lens Options).</p> <p>E. HOUSING Die formed one piece cold rolled steel Lens Housing with welded seams. (Specify gauge).</p>	<p>F. HINGE Heavy gauge internal security Hinge supports Lens Housing during relamping.</p> <p>G. BALLAST HPF, Class P, Energy saving Ballast (See Voltage, Ballast Options).</p> <p>H. LAMPS 13W Twin Tube, 18W, 26W or 28W Quad Lamps. See Lamp Options. (Lamps by others).</p> <p>I. FINISH Polyester Powder coat white finish with 92% reflectance.</p> <p>J. UL LISTED Suitable for Damp Locations.</p>
--	---

LAMP SELECTION



LAMPS: (2) 13W Twin Tube
18W Quad Tube
26W Quad Tube
28W Quad Tube



LAMPS: (3) 13W Twin Tube
18W Quad Tube
26W Quad Tube
28W Quad Tube



LAMPS: (4) 13W Twin Tube

ORDERING INFORMATION

DWL-1 -

GAUGE	No. of LAMPS	WATTAGE	VOLTAGE	BALLAST	LENS / OPTIONS	OPTIONS
T=12 Gauge	1=1 Lamp	13=13Watts	120=120Volts	EB=Electronic	ROOM SIDE	AH = Allen Head Screws
Super Max.	2=2 Lamps	Twin Tube	277=277Volts	Ballast	18CP=.187"Clear P/C	GF = GLR Fuse
F=14 Gauge	3=3 Lamps	18=18Watts	347=347Volts	MB=Magnetic	25CP=.250"Clear P/C	NL = Night Light (PL-7or 9)
Maximum	4=4 Lamps	Quad Tube		Ballast	37CP=.375"Clear P/C	
S=16 Gauge		26=26Watts			50CP=.500"Clear P/C	
Medium		Quad Tube			18TG=.187"Temp.Glass	
E=18 Gauge		28=28Watts			25TG=.250"Temp.Glass	
Minimum		Quad Tube			37TG=.375"Temp.Glass	(More than one Option
Security					50TG=.500"Temp.Glass	can be specified)

LAMP SIDE

12PA=.125"Prism. Acrylic
15PP=.156"Prism. P/C
18PP=.187"Prism. P/C
15PG=.156"Prism. Temp. Glass
UO = UV Absorbing Overlay
(Other Lens Options Available.
Consult Factory)

EXAMPLE: DWM - 1 - F - 2 - 13 - 277 - MB - 25CP/15PP - AH

DESCRIPTION: DWM - 1 = Series DWM, 1 foot nominal size
F = 14 Gauge Cold Rolled Steel - Maximum Security
2 = 2 Lamps
13 = 13 Watts Biax Twin Tube
277 = 277 Volt Operation
MB = Magnetic Ballast
25CP/15PP= .250" Thick Clear Polycarbonate on Room Side / .156" Thick Prismatic Polycarbonate on Lamp Side
AH = Allen Head Screws in Lens Housing

FIXTURE TYPE		COMMENTS
CATALOG NUMBER	DWM-1-	
JOB NAME		
APPROVAL		
DATE		

Dimensions and Specifications subject to change without notice
Fixture guaranteed for one year against mechanical defects in manufacture.
2-97 DWM-1