



A.R4


ARB-11

ARCHITECTURAL / HIGH ABUSE

ARCHITECTURAL
ROUND
HALF LID FACEPLATE
SURFACE FLUORESCENT

11 in. Round

LIGHTING FOR COMPLEX ENVIRONMENTS

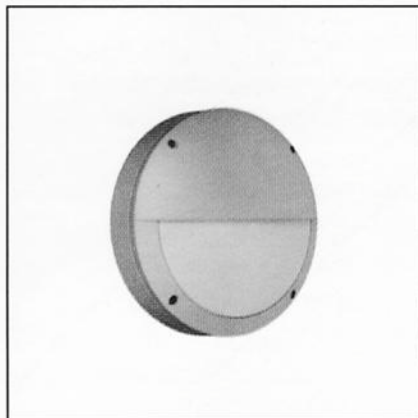

These aesthetically pleasing Architectural fixtures feature die cast aluminum Housing, molded unbreakable lens and optional tamperproof screws, which help ARB Series withstand severe punishment, and make them ideally suited for both every day and high abuse areas.


APPLICATIONS

- Building facades
- Schools / Universities
- Apartments / Condominiums / Public Housing
- Convenience Stores
- Government Facilities
- Hospitals


FEATURES

- Cast aluminum Housing
- 11 in. diameter nominal size, 4.1 in. deep
- Injection molded prismatic polycarbonate Refractor provides uniform illumination
- Optional Tamperproof Screws
- Wall mounted
- Non-corrosive durable coating
- Maintenance free, one time installation
- Stands up to physical impact and tampering
- Suitable for high pressure Hosedown

OVERALL DIMENSIONS

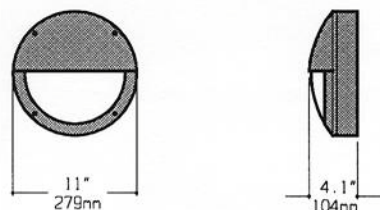


MOUNTING



SPECIFICATIONS

<p>HOUSING Faceplate and Base in die cast aluminum. Silver color standard. Optional colors: White, Black, Bronze.</p> <p>GASKET Weather proof silicone Gasket around inside of Lens seals Lens to Housing.</p> <p>FASTENERS (4) Captive stainless steel fasteners. (For tamperproof fasteners see Options).</p> <p>LENS .156" Opal injection molded polycarbonate Lens for even illumination.</p>	<p>LAMPS 13W Twin, 13, 18, or 26W Quad Lamps. See Lamp Options. (Lamps by others).</p> <p>BALLAST NPF, self-start Class P, or electronic Ballast. (See Voltage, Ballast Options).</p> <p>FINISH Polyester Powder coat finish. Silver standard. (See Color Options).</p> <p>U.L. LISTED Suitable for Wet Locations.</p>
---	--

LAMP SELECTION



LAMPS: (1) 13W Twin
(1) 13W Quad
(1) 18W Quad
(1) 26W Quad



LAMPS: (2) 13W Twin
(2) 13W Quad
(2) 18W Quad

ORDERING INFORMATION

ARB-11 -	No. of LAMPS	WATTAGE	VOLTAGE	BALLAST	OPTIONS
	1= 1 Lamp	13=13W Twin (1,2)	120=120 Volts	EB=Electronic Ballast	GF=GLR Fuse
	2= 2 Lamps	13Q=13W Quad (1,2)	277=277 Volts	MB=Magnetic Ballast	TH=Torx Head TP Screw
		18Q=18W Quad (1,2)	347=347 Volts	EBH=Electronic Ballast <10% THD	AH=Allen Head TP Screw
		26Q=26W Quad (1)	UNV=120-277 Volts		BRZ=Bronze Finish
					BLK=Black Finish
					WHT=White Finish

(More than one Option can be specified)

EXAMPLE: ARB - 11 - 1 - 18Q - 277 - EB - AH

DESCRIPTION: ARB - 11 = Series ARB, 11 inches round nominal size
 1 = 1 Lamp
 18Q = 18 Watts Quad Tube
 277 = 277 Volt Operation
 EB = Electronic Ballast
 AH = Allen Head TP Screws

FIXTURE TYPE		COMMENTS
CATALOG NUMBER	ARB-11-	
JOB NAME		
APPROVAL		
DATE		